

This version applied for INDOCHINA IMEXTRA
CO.,LTD ; VIETNAM only

TOPRUNNER

12R22.5**CR975****CR976****CR958****CR995**

MAIN SIZES AND PARAMETERS

Pattern Name	Size	Ply Rating	Standard Rim	Load Index	Speed Rating	Air Pressure		Dual Load		Single Load		Overall Diameter	Section Width	Tread Depth
						Kpa	PSI	Kg	LBS	Kg	LBS			
CR958	12R22.5	18	9.00	152/148	M	930	135	3150	7170	3550	7830	1084	300	16.50
CR975	12R22.5	18	9.00	152/148	M	930	135	3150	7170	3550	7830	1084	300	15.00
CR976	12R22.5	18	9.00	152/149	L	930	135	3250	7170	3550	7830	1084	300	15.00
CR995	12R22.5	18	9.00	152/149	F	930	135	3250	7165	3550	7825	1084	300	16.50

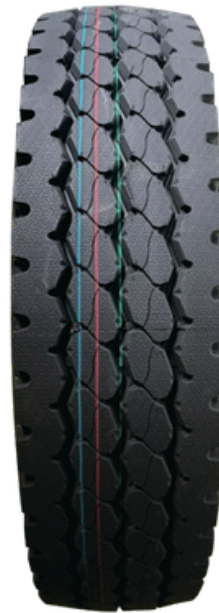
This product cannot be used for lorries truck and buses

11R22.5
CR926 **CR911** **CR923** **CR975**

MAIN SIZES AND PARAMETERS

Pattern Name	Size	Ply Rating	Standard Rim	Load Index	Speed Rating	Air Pressure		Dual Load		Single Load		Overall Diameter	Section Width	Tread Depth
						Kpa	PSI	Kg	LBS	Kg	LBS			
CR975	11R22.5	18	8.25	148/145	M	830	120	2725	6010	3000	6610	1053	279	21.00
CR926	11R22.5	18	8.25	146/143	L	830	120	2725	6010	3000	6610	1053	279	14.50
CR911	11R22.5	18	8.25	146/143	L	830	120	2725	6010	3000	6610	1053	279	15.00
CR923	11R22.5	18	8.25	148/145	M	850	125	2900	6390	3150	6945	1050	279	14.00

This product cannot be used for lorries truck and buses

11.00R20**CR926****CR928****CR932****CR935**

MAIN SIZES AND PARAMETERS

Pattern Name	Size	Ply Rating	Standard Rim	Load Index	Speed Rating	Air Pressure		Dual Load		Single Load		Overall Diameter	Section Width	Tread Depth
						Kpa	PSI	Kg	LBS	Kg	LBS			
CR926	11.00R20	18	8.0	152/149	L	930	135	3250	7170	3550	7830	1085	293	16.50
CR928	11.00R20	18	8.0	152/149	L	930	135	3250	7170	3550	7830	1085	293	16.50
CR932	11.00R20	18	8.0	152/149	L	950	135	3250	7170	3550	7830	1085	293	16.50
CR935	11.00R20	18	8.0	152/149	L	930	135	3250	7170	3550	7830	1085	293	18.00

This product cannot be used for lorries truck and buses

12.00R20**CR335****CR922****CR926****CR930**

MAIN SIZES AND PARAMETERS

Pattern Name	Size	Ply Rating	Standard Rim	Load Index	Speed Rating	Air Pressure		Dual Load		Single Load		Overall Diameter	Section Width	Tread Depth
						Kpa	PSI	Kg	LBS	Kg	LBS			
CR335	12.00R20	20	8.5	156/153	K	900	130	3450	8050	3750	8820	1125	315	25.00
CR922	12.00R20	20	8.5	156/153	K	900	130	3650	8050	4000	8820	1125	315	17.00
CR926	12.00R20	20	8.5	156/153	K	900	130	3650	8050	4000	8820	1125	315	17.00
CR930	12.00R20	20	8.5	156/153	K	900	130	3650	8050	4000	8820	1125	315	20.5

This product cannot be used for lorries truck and buses