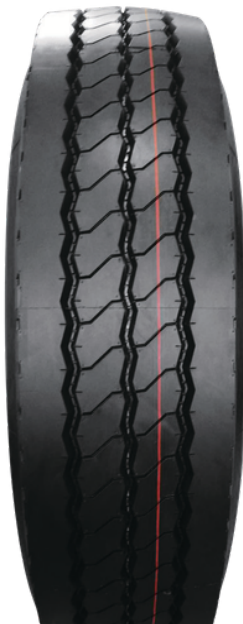


**This version applied for
Vietnam market only**

Toprunner Roadking Doupro



12R22.5

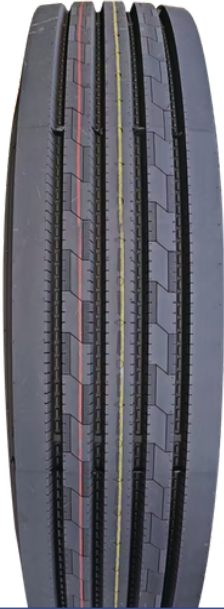


CR975 CR976 CR958 CR995 CR996

MAIN SIZES AND PARAMETERS

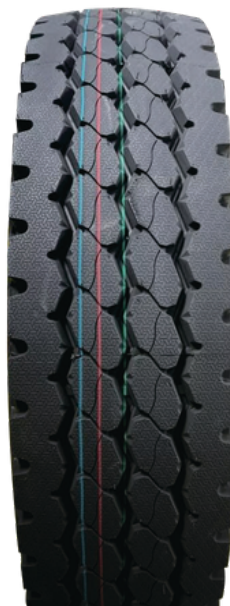
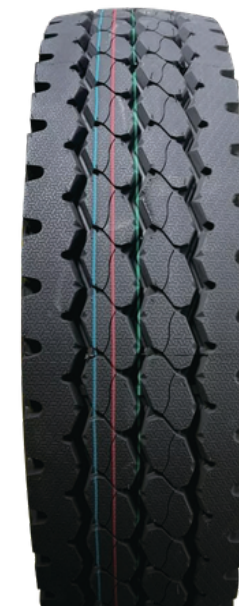
Pattern Name	Size	Ply Rating	Standard Rim	Load Index	Speed Rating	Air Pressure		Dual Load		Single Load		Overall Diameter	Section Width	Tread Depth
						Kpa	PSI	Kg	LBS	Kg	LBS			
CR975	12R22.5	18	9.00	152/148	M	930	135	3150	7170	3550	7830	1084	300	15.00
CR976	12R22.5	18	9.00	152/149	L	930	135	3250	7170	3550	7830	1084	300	15.00
CR958	12R22.5	18	9.00	152/148	M	930	135	3150	7170	3550	7830	1084	300	16.50
CR995	12R22.5	18	9.00	152/149	F	930	135	3250	7170	3550	7830	1084	300	16.50
CR996	12R22.5	18	9.00	152/149	L	930	135	3250	7170	3550	7830	1084	300	16.50

This product cannot be used for lorries truck and buses

11R22.5**CR926****CR911****CR923****CR975****YS615****MAIN SIZES AND PARAMETERS**

Pattern Name	Size	Ply Rating	Standard Rim	Load Index	Speed Rating	Air Pressure		Dual Load		Single Load		Overall Diameter	Section Width	Tread Depth
						Kpa	PSI	Kg	LBS	Kg	LBS			
CR926	11R22.5	18	8.25	146/143	L	830	120	2725	6010	3000	6610	1053	279	14.50
CR911	11R22.5	18	8.25	146/143	L	830	120	2725	6010	3000	6610	1053	279	15.00
CR923	11R22.5	18	8.25	148/145	M	830	120	2725	6010	3000	6610	1053	279	14.00
CR975	11R22.5	18	8.25	148/145	M	830	120	2725	6010	3000	6610	1053	279	21.00
Ys615	11R22.5	18	8.25	148/145	M	830	120	2725	6010	3000	6610	1053	279	14.00

This product cannot be used for lorries truck and buses

11.00R20**CR926****CR928****CR932****CR935****A1063****MAIN SIZES AND PARAMETERS**

Pattern Name	Size	Ply Rating	Standard Rim	Load Index	Speed Rating	Air Pressure		Dual Load		Single Load		Overall Diameter	Section Width	Tread Depth
						Kpa	PSI	Kg	LBS	Kg	LBS			
CR926	11.00R20	18	8.0	152/149	L	930	135	3250	7170	3550	7830	1085	293	16.50
CR928	11.00R20	18	8.0	152/149	L	930	135	3250	7170	3550	7830	1085	293	16.50
CR932	11.00R20	18	8.0	152/149	L	950	135	3250	7170	3550	7830	1085	293	16.50
CR935	11.00R20	18	8.0	152/149	L	930	135	3250	7170	3550	7830	1085	293	18.00
A1063	11.00R20	18	8.0	152/149	L	950	135	3250	7170	3550	7830	1085	293	16.50

This product cannot be used for lorries truck and buses



12.00R20



CR335



CR922



CR926



CR930

MAIN SIZES AND PARAMETERS

Pattern Name	Size	Ply Rating	Standard Rim	Load Index	Speed Rating	Air Pressure		Dual Load		Single Load		Overall Diameter	Section Width	Tread Depth
						Kpa	PSI	Kg	LBS	Kg	LBS			
CR335	12.00R20	20	8.5	156/153	K	900	130	3450	8050	3750	8820	1125	315	25.00
CR922	12.00R20	20	8.5	156/153	K	900	130	3650	8050	4000	8820	1125	315	17.00
CR926	12.00R20	20	8.5	156/153	K	900	130	3650	8050	4000	8820	1125	315	17.00
CR930	12.00R20	20	8.5	156/153	K	900	130	3650	8050	4000	8820	1125	315	20.50

This product cannot be used for lorries truck and buses